


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 12 TOWNSHIP 14 RANGE 3  
DATE: 7-31-04  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison (raised 2")  
METHOD OF ESTABLISHMENT: County: 7-8-96

IN. S.P.C. E ZONE NAD '83  
NAME: 14031205  
N: 491178.2342(m)  
E: 58619.4365(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

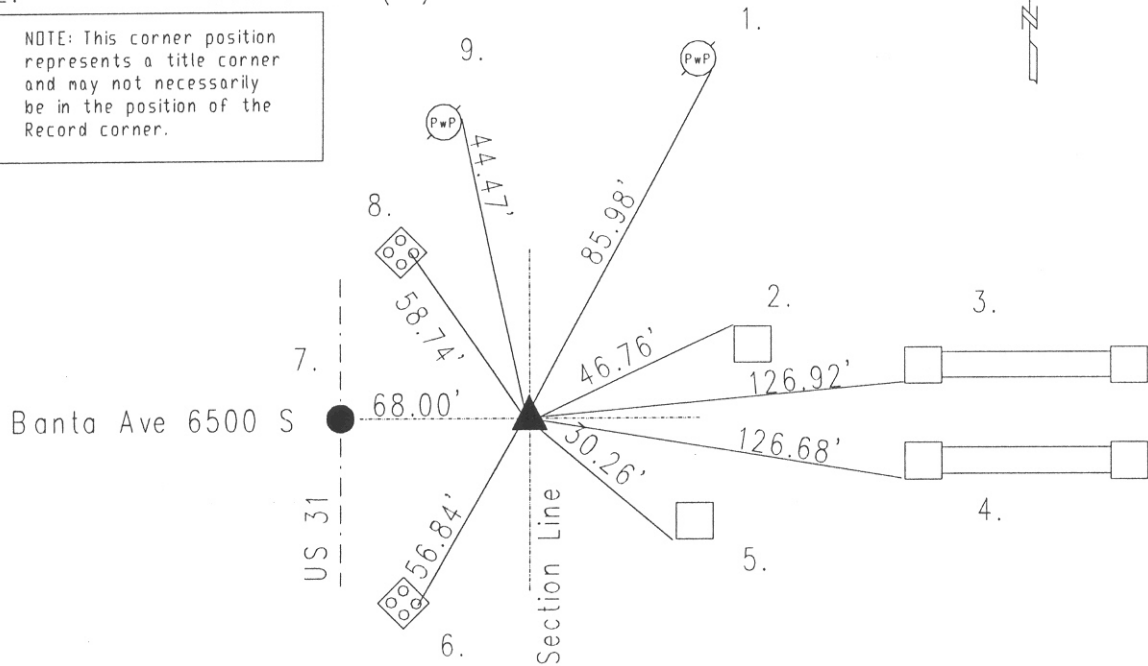

Original post set 1820 by Laughlin (no witness) per Marion County Atlas. Smith 1-6-1857 called rock w/witness: 20" ash S 19 E 10 links, 8" beech W 76 E 13 links. Burres 10-13-48 called 4" plate axle shaft set in place of old stake over stone. 6-13-75 Miller called axle shaft. Gries 5-19-87 called same. 8-31-90 Wilcoxon called same. 8-15-91 Wilcoxon set Harrison per accordance with the Highway Construction Project. Re-tied 7-8-96 by Kiste. Re-tied 10-2-00 by Kiste. Re-tied 7-31-04 by Wilcoxon.  
14031205

REF.	DISTANCE	DESCRIPTION
1.	85.98'	PK nail E PwP#554-727 60"up
2.	46.76'	Cut 'x' in curb W of inlet
3.	126.92'	Cut 'x' in curb by bridge at the end of apron
4.	126.68'	Cut 'x' in curb by bridge at the end of apron
5.	30.26'	Cut 'x' in curb just W of inlet
6.	56.84'	Cut 'x' E corner of aluminum pole concrete base
7.	68.00'	Due W to US 31 500 EC/L
8.	58.74'	Cut 'x' E corner of aluminum pole concrete base
9.	44.47'	PK nail E PwP#3347-727